


SMD Power Inductors CD32 Series



CD32 Series ,Various high power inductors are superior to be high saturation for surface mounting.

Mainly used by power supply for VRT,OA equipment
Digital camera,LCD television set notebook PC,portable communication equipments,DC/DC converters, etc.

Land Pattern

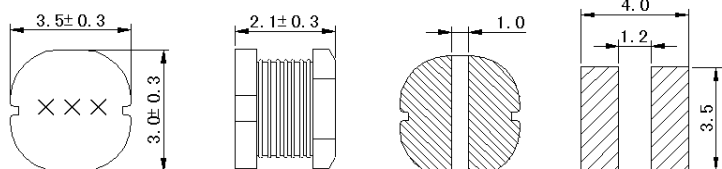

Unit:mm

P/N	L (uH) ±10%	DCR(mohm) Max	Isat (A)
CD32-2R2M	2.2	80	1.80
CD32-3R3M	3.3	110	1.70
CD32-3R9M	3.9	130	1.60
CD32-4R7M	4.7	170	1.50
CD32-5R6M	5.6	185	1.20
CD32-6R8M	6.8	200	1.05
CD32-8R2M	8.2	220	0.90
CD32-100K	10	230	0.76
CD32-120K	12	270	0.685
CD32-150K	15	310	0.635
CD32-180K	18	410	0.525
CD32-220K	22	470	0.500
CD32-270K	27	660	0.405
CD32-330K	33	760	0.380
CD32-390K	39	850	0.355
CD32-470K	47	970	0.330
CD32-560K	56	1250	0.290
CD32-680K	68	1450	0.275
CD32-820K	82	1850	0.235
CD32-101K	100	2200	0.220
CD32-121K	120	2900	0.185
CD32-151K	150	3400	0.170
CD32-181K	180	3900	0.165
CD32-221K	220	4500	0.155
CD32-271K	270	6000	0.135
CD32-331K	330	7000	0.125
CD32-391K	390	7800	0.115

1. Inductance tested at 100KHz, 0.1V;
2. SRF > 13MHz measured using Agilent / HP8753D network Analyzer;
3. Inductance drop = 10% typ. at rated Isat;
4. $\Delta T = 40^\circ\text{C}$ rise typ. at Irms;
5. Operating temperature range -40°C to $+125^\circ\text{C}$;
6. Electrical specifications at $+25^\circ\text{C}$;

Packing :
Reel size: 12 mm
Quantity: 2000 PCS/Reel

Special inquiries besides the above common used types can be met on your requirement.

<http://www.coilsjs.com>
Sales@coilsjs.com