
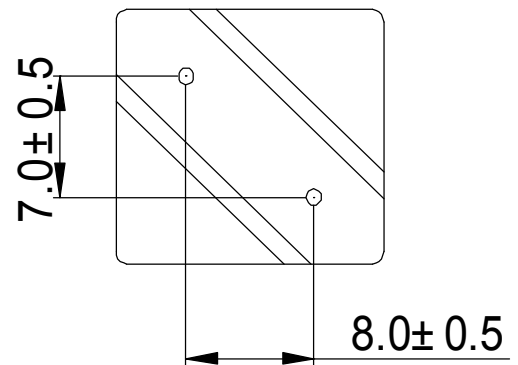


## SMD Power Inductors CDM1714 Series

CDM1714 Series ,Ultra low cost,Shielded construction,High current rating up to DC 50Amp,High frequency range up to 1.0MHz,Very low DC resistance,Low Noise,RoHS compliant.

Mainly used by Motherboards for laptop and desktop computers,DC/DC converter

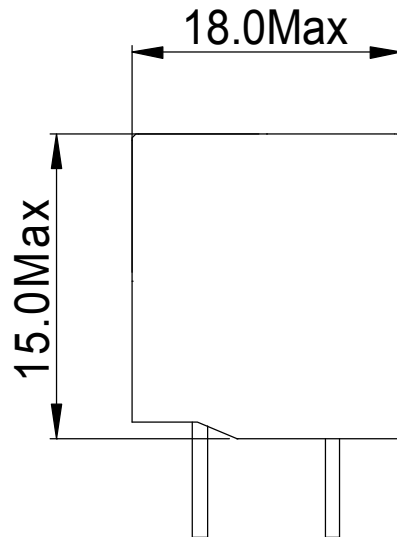

Part Number (品名)	L(uH)	H (高度)	PIN DIM (PIN 径)	DCR(mΩ) (直流阻抗)		I <sub>rms</sub> DC Current (A) (温升电流)
		MAX	±0.2	TYP	MAX	Typical
CDM1714-100M-B-S	10.00	15	1.0	0.52	13	11
CDM1714-150M-B-S	15.00	15.0	1.0	0.6	17.00	10.00
CDM1714-220M-B-S	22.00	18.0	1.0	0.60	20.00	8
CDM1714-330M-B-S	33.00	18.0	1.0	0.60	25.00	6.00

Special inquiries besides the above common used types can be met on your requirement.

<1>I<sub>rms</sub>: The value of current indicates that the temperature of the coil is increase 40°C (typical).

<2>I<sub>sat</sub>: The value of current indicates that inductance drops 20%(typical)from its initial value without DC current.

<3>Test condition:Ta= 25°C

<4>Test condition:100KHz 0.1V.

In Bulk Packing